

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Borran, et al.
Title: PARTIALLY COHERENT
CONSTELLATIONS FOR
MULTIPLE-ANTENNA
SYSTEMS
Appl. No.: 10/671,346
Filing Date: 9/24/2003
Examiner: Kevin Michael Burd
Art Unit: 2611
Confirmation Number: 7074

Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

DECLARATION UNDER 37 C.F.R. § 1.132

Sir:

I, Callie M. Bell, hereby declare the following:

1. I am an attorney of record for United States Patent Application No. 10/671,346, filed on September 24, 2003.

2. Attached as Exhibit C is a true and accurate copy of the Proceedings of the IEEE International Symposium on Information Theory (ISIT) 2002 Conference printed from the webpage IEEE Explore. Exhibit C includes a Table of Contents for the Proceedings of the ISIT 2002 Conference that indicates a presentation by Mohammad Jaber Borran, Ashutosh Sabharwal, Behnaam Aazhang, and Don H. Johnson, titled On Design Criteria and Construction of Noncoherent Space-time Constellations occurred Monday June 30, 2002 in Lausanne, Switzerland (page XI). Exhibit C further includes a one- page summary of the presentation titled On Design Criteria and Construction of Noncoherent Space-time Constellations included at page 74 of the Proceedings of the ISIT 2002 Conference.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and believe are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Respectfully submitted,

Dated: July 8, 2008

FOLEY & LARDNER
150 East Gilman Street
Madison, Wisconsin 53701-1497
Telephone: (608) 258-4263
Facsimile: (608) 258-4258

By 

Callie M. Bell
Attorney for Applicant
Registration No. 54,989

Exhibit C

Proceedings

**2002 IEEE
International Symposium
on Information Theory**

Palais de Beaulieu
Lausanne, Switzerland

June 30 – July 5, 2002



Sponsored by
the Information Theory Society
of the Institute of Electrical and Electronics Engineers

Proceedings 2002 IEEE International Symposium on Information Theory

Copyright and Reprint Permission: Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limit of U.S. copyright law for private use of patrons those articles in this volume that carry a code at the bottom of the first page, provided the per-copy fee indicated in the code is paid through Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. For other copying, reprint or republication permission, write to IEEE Copyrights Manager, IEEE Operations Center, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331. All rights reserved. Copyright ©2002 by The Institute of Electrical and Electronics Engineers, Inc.

IEEE Catalog Number:	02CH37371
ISBN:	0-7803-7501-7
Library of Congress:	72-179437

Additional copies of this publication are available from:

IEEE Operations Center
P.O. Box 1331
445 Hoes Lane
Piscataway, NJ 08855-1331 USA
1-800-678-IEEE
1-732-981-1393
1-732-981-9667 (Fax)
email: customer-service@ieee.org

Table of Contents

Plenary Sessions

Monday 8:30 - 9:30 — Quantum Mechanics, Chaos, and the Primes

Michael V. Berry

Tuesday 8:30 - 9:30 — Saving Bandwidth in the Wideband Regime

Sergio Verdú

Wednesday 8:30 - 9:30 — Advances in Convex Optimization: Theory, Algorithms, and Applications

Stephen P. Boyd

Thursday 8:30 - 9:30 — Shannon Lecture: Living Information Theory

Toby Berger

Friday 8:30 - 9:30 — The Marriage of Cryptography and Complexity Theory

Shafi Goldwasser

Mon 09:40 – 11:00

Analysis of LDPC Codes I

Finite-Length Analysis of Various Low-Density Parity-Check Ensembles for the Binary Erasure Channel <i>Tom Richardson, Amin Shokrollahi, Rüdiger Urbanke</i>	1
Stopping Sets and the Girth of Tanner Graphs <i>Alon Orlitsky, Rüdiger Urbanke, Krishnamurthy Viswanathan, Junan Zhang</i>	2
Finite-Length Analysis of LDPC Codes with Large Left Degrees <i>Junan Zhang, Alon Orlitsky</i>	3
On the Suboptimality of Iterative Decoding for Finite Length Codes <i>Motohiko Isaka, Marc P. C. Fossorier, Hideki Imai</i>	4

Performance Analysis of Convolutional and Turbo Codes

Computing the Minimum Distances of Linear Codes by the Error Impulse Method <i>Claude Berrou, Sandrine Vatou</i>	5
Performance Bounds for Convolutional Codes over Finite State Channels <i>Cecilio Pimentel</i>	6
Analytic Expression for the Exact Bit Error Probability of the (7,5) Convolutional Code <i>Michael Lentmaier, Dmitri Truhachev, Kamil Sh. Zigangirov</i>	7

Stochastic Processes

Statistical Characterisation of the Response of a Volterra Non-Linearity to a Cyclo-Stationary Zero-Mean Gaussian Stochastic Process <i>Miguel R. D. Rodrigues, John J. O'Reilly</i>	8
On Coding for Binary Markov Fields with Fibonacci Interaction. <i>Sergey I. Stasevich, Sergey N. Ganebmykh, Valery N. Koshelev</i>	9
Spectra of Shot Noises and Hawkes Branching Point Processes <i>Pierre Brémaud, Laurent Massoulié</i>	10
Almost Sure Convergence of Titterton's Recursive Estimator for Mixture Models <i>Shaojun Wang, Yunxin Zhao</i>	11

Wireless Sensor Networks

Asymptotic Delay in Random Wireless Networks <i>Mohiuddin Ahmed, Gregory Pottie</i>	12
Detection Performance in Self-Organized Wireless Sensor Networks <i>Robert E. Van Dyck</i>	13

Downlink-Uplink Duality and Effective Bandwidths <i>David N. C. Tse, Pramod Viswanath</i>	52
Delay-Optimal Power Control for Wireless Data Users with Average Power Constraints <i>Won S. Yoon, Thierry E. Klein</i>	53

Mon 14:30 – 15:50

Turbo Code Design

Design of Turbo Codes Interleaver by Loop Distributions <i>Jungpil Yu, Marie-Laure Boucheret, Robert Vallet</i>	54
Interleaver Pruning for Construction of Variable Length Turbo Codes <i>Fereydown (Fred) Daneshgaran, Paolo Mulassano</i>	55
Turbo Code at 0.03 dB from Capacity Limit <i>Joseph Boutros, Giuseppe Caire, Emanuele Viterbo, Hadi Sawaya, Sandrine Vialle</i>	56
Non-Binary Turbo Codes <i>Andrew C. Reid, Desmond P. Taylor, T. Aaron Gulliver</i>	57

Algebraic Geometry Codes

Synthesis of the Simplest Linear Feedback Shift Register Allowing Prescribed Pairs of Input and Output Sequences — a Fast Algorithm for Solving Discrete-Time Wiener-Hopf Equations <i>Shojiro Sakata</i>	58
Integral Closures and Weight Functions over Finite Fields <i>Douglas A. Leonard, Ruud Pellikaan</i>	59
A Class of Gröbner Basis Theoretically Based Evaluation Codes <i>Hans Olav Geil</i>	60
Explicit Construction of Codes on an Asymptotically Bad Tower of Function Fields <i>Wei-Hsin Gu, Chung-Chin Lu</i>	61

Multi-Terminal Source Coding I

On Zero-Error Coding of Correlated Sources <i>Prashant Koulgi, Ertem Tuncel, Kenneth Rose</i>	62
Joint Entropy-Constrained Multiterminal Quantization <i>Jean Cardinal, Gilles Van Assche</i>	63
Stealing Bits from a Quantized Source <i>Aaron S. Cohen, Stark C. Draper, Emin Martinian, Gregory W. Wornell</i>	64
Successively Structured CEO Problems <i>Stark C. Draper, Gregory W. Wornell</i>	65

Sequences I

Quadruphase and 8-Phase Sequences and Sequence Pairs with Imaginary Correlation Sidelobes <i>Hans Dieter Lüke, Hafez Hadinejad-Mahram</i>	66
On the Self-Interferences of SS Codes Generated by a Markov Chain <i>Yutaka Jitsumatsu, Tohru Kohda</i>	67
New Families of Unimodular Perfect Sequences of Prime Length Based on Gaussian Periods <i>Ernst M. Gabidulin, Vitaly V. Shorin</i>	68
Feedback with Carry Shift Registers Synthesis with the Euclidean Algorithm <i>François Arnault, Thierry P. Berger, Abdelkader Nacer</i>	69

Capacity of Quantum Channels

Scalable Programmable Quantum Gates and a New Aspect of the Additivity Problem for the Classical Capacity of Quantum Channels <i>Andreas Winter</i>	70
--	----

A General Formula for the Classical Capacity of a General Quantum Channel <i>Masahito Hayashi, Hiroshi Nagaoka</i>	71
An Exponential Lower Bound on the Highest Fidelity Achievable by Quantum Error-Correcting Codes <i>Mitsuru Hamada</i>	72
A New Proof of the Channel Coding Theorem via Hypothesis Testing in Quantum Information Theory <i>Tomohiro Ogawa, Hiroshi Nagaoka</i>	73

Non-coherent Communication over MIMO Channels

On Design Criteria and Construction of Non-Coherent Space-Time Constellations <i>Mohammad Jaber Borran, Ashutosh Sabharwal, Behnaam Aazhang, Don H. Johnson</i>	74
Differentially En/Decoded Orthogonal Space-Time Block Codes with APSK Signals <i>Xiang-Gen Xia</i>	75
Combined Information and Performance Optimization of Linear MIMO Modulations <i>Olav Tirkkonen, Rinat Kashaev</i>	76
Space-Time Codes for the GLRT Noncoherent Detector <i>Sandra Gallioui, Ines Kammoun, Jean-Claude Belfiore</i>	77

Power Control and Resource Allocation

Power Control in Uplink and Downlink CDMA System with Multiple Flow Types <i>Yun Li, Anthony Ephremides</i>	78
Optimal Power Control in CDMA over Markov Fading Channels <i>Ngoc Thanh Bui, Subhrakanti Dey</i>	79
On Resource Allocation in Asynchronous CDMA Channels <i>Slawomir Stańczak, Holger Boche</i>	80
Optimal Resource Allocation Policies for a Multiaccess Fading Channel with a Quality of Service Constraint <i>Munish Goyal, Vinod Sharma, Anurag Kumar</i>	81

Mon 16:10 – 17:50

Analysis of Turbo Codes

On Algorithms for Determination of Turbo Code Weight Distribution <i>Eirik Rosnes, Øyvind Ytrehus</i>	82
A Note on the Analysis of Finite Length Turbo Decoding <i>Jeong W. Lee, Richard E. Blahut</i>	83
On the Minimum Distance of Turbo Codes <i>Dmitri Truhachev, Michael Lentmaier, Ola Wintzell, Kamil Sh. Zigangirov</i>	84
On the Asymptotic Analysis of Superorthogonal Turbo Codes <i>Ola Wintzell, Michael Lentmaier, Kamil Sh. Zigangirov</i>	85

Decoding of Block Codes

A Parallel Version of a Special Case of the Sudan Decoding Algorithm <i>Daniel Augot</i>	86
High-Speed and Low-Latency Decoding of Reed-Solomon Codes <i>Hyeong-Ju Kang, In-Cheol Park</i>	87
Decoding Xing-Ling Codes <i>Rasmus Refslund Nielsen</i>	88
Decoding beyond the Designed Error Correcting Capability on the Basis of Supercodes <i>Sergei Fedorenko, Eugenii Krouk</i>	89
On Calculating Interpolation Polynomials for Error Values in Reed-Solomon Decoding Algorithm <i>Yasunao Katayama, Toshiyuki Yamane</i>	90

On Design Criteria and Construction of Non-coherent Space-Time Constellations

Mohammad Jaber Borran, Ashutosh Sabharwal, Behnaam Aazhang, and Don H. Johnson
ECE Department, Rice University, 6100 Main St., MS-366, Houston, TX 77005-1892
Email: {mohammad, ashu, aaz, dhj}@rice.edu

We consider a non-coherent communication system with M transmit and N receive antennas in a block Rayleigh flat fading channel with coherence interval of T symbol periods. We use the following complex baseband notation

$$X = SH + W, \quad (1)$$

where S is the $T \times M$ transmitted matrix, X is the $T \times N$ received matrix, and H and W are the unknown (to both transmitter and receiver) $M \times N$ and $T \times N$ matrices of the i.i.d. fading coefficients and additive noise terms from $\mathcal{CN}(0, 1)$. The transmitted symbols are also assumed to be power constrained, $\sum_{t=1}^T \sum_{m=1}^M \mathbb{E}\{|s_{tm}|^2\} = P$.

The capacity of non-coherent systems was studied in [1], where it was shown that at high SNR or when the coherence interval is much greater than the number of transmit antennas, capacity can be achieved by using a constellation of unitary matrices. However, at low SNR, or for small values of T (e.g., $T = 1$), unitary constellations are no longer optimal. The exact expression for the pairwise error probability of unitary constellations and the Chernoff upper bound are also given in [1]. However, these expressions appear to be intractable for the general case. Therefore, inspired by Stein's lemma [3], we propose the use of Kullback-Leibler [3] distance between distributions to approximate the exponential decay rate of pairwise error probabilities. The design problem will then be to seek constellations that have the largest minimum KL distance between the received distributions assigned to their elements (maximin code design). The resulting constellations coincide with the unitary designs at very high SNR or very low rates. But for high rate codes or at low SNR, different signal sets are obtained which show better probability of error performance.

The KL distance between $p_i = p(X|S_i)$ and $p_j = p(X|S_j)$, where S_i and S_j are two different $T \times M$ matrices from the constellation, can be calculated as

$$\mathcal{D}(p_i||p_j) = N\alpha \left\{ (I_T + S_i S_i^H)(I_T + S_j S_j^H)^{-1} \right\} - NT - N \ln \det \left\{ (I_T + S_i S_i^H)(I_T + S_j S_j^H)^{-1} \right\}. \quad (2)$$

Examining (2) shows that the KL distance consists of two parts. For example, for $M = 1$, (2) reduces to

$$\mathcal{D}(p_i||p_j) = \left[\frac{1 + \|S_i\|^2}{1 + \|S_j\|^2} - \ln \left(\frac{1 + \|S_i\|^2}{1 + \|S_j\|^2} \right) - 1 \right] + \left[\frac{\|S_i\|^2 \|S_j\|^2 \sin^2(\angle S_i, S_j)}{1 + \|S_j\|^2} \right], \quad (3)$$

in which, the first part is due to having different magnitudes (lying on different spheres in \mathbb{C}^T), and the second part is due to the angle between the points (lying on different one-dimensional subspaces of \mathbb{C}^T). This decoupling property suggests partitioning the signal space into subsets of concentric spheres and using

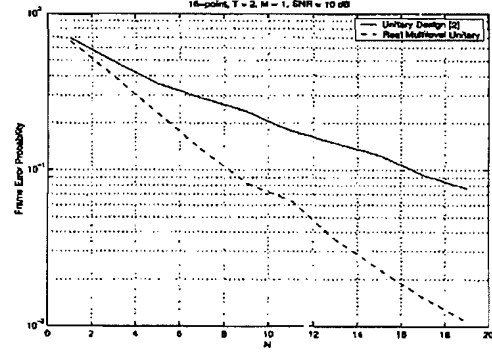


Fig. 1: Frame error rate comparison of 16-point real constellations

only intrasubset and intersubset KL distances in the maximin problem.

The unitary space-time codes of [1] have exponential encoding and decoding complexity. In [2] suboptimal unitary constellations with very low encoding and decoding complexity are proposed. In this work, we use the low complexity designs of [2] as the subsets of our multilevel constellation. The resulting 16-point real constellation for $T = 2$ and $\text{SNR} = 10\text{dB}$ is a two level constellation, with 4 points on the inner circle and 12 points on the outer circle. The error rate performance of this constellation is simulated for different values of N and compared with the corresponding constellation proposed in [2]. The results are shown in Fig. 1. As we see, by using multilevel constellations (which use contributions from both parts of the KL distance) instead of single level unitary constellations (in which the first part of the KL distance is always zero), the performance of the non-coherent systems can be significantly improved. Moreover, the new constellations have a decoding complexity similar to the low complexity designs of [2].

REFERENCES

- [1] B. M. Hochwald and T. L. Marzetta, "Unitary space-time modulation for multiple-antenna communications in Rayleigh flat fading," *IEEE Trans. on Info. Theory*, vol. 46, no. 2, pp. 543–564, March 2000.
- [2] V. Tarokh, "On the design of the first unitary space-time codes that have simple encoding/decoding algorithm," in *Proc. of the 39th Allerton Conf., Monticello, IL, Oct. 2001*.
- [3] T. M. Cover and J. A. Thomas, *Elements of Information Theory*, Wiley Interscience, 1991.